





Powerdot

935-PD13W-GST
 935-PD13-GST

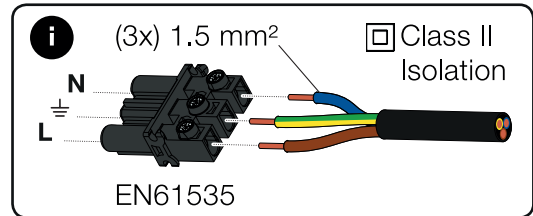

CONTENT:

-  **x1**
-  **x1**
-  **x1**

A DRILL

Drill a hole

B INSERT

Optional frame

C TURN CLOCKWISE & PLUG IN
Turn the plastic fastening nut as far up the thread as possible. Make sure that it has been thoroughly tightened. Lastly, connect the GST18i3.

1 CONNECT
Connect plug to Powerdot

2 RELEASE
Rotate counter clockwise

3 ADJUST
The inner part should now be loose. Adjust to desired level (see next step).

-  - 1 **USB port**
-  - 1 **HDMI port**
-  - 1 **GST18i3**
Cable length according to order (max 1.2 m)

4 ADJUST LEVELS

LEVEL 1
0 mm / Flat
89 mm

LEVEL 2
-6 mm / Sunk
95 mm

LEVEL 3
-50 mm / Sunk
140 mm

5a LOCK Level 1 & 2
Rotate clockwise

5b LOCK Level 3
Rotate