

CEILING LOUDSPEAKERS

PC Plastic Ceiling Loudspeakers

ABS plastic ceiling loudspeakers with built-in 100V transformer.


PC 5T & PC 8T

These units provide an excellent full range of clear sound reproduction. Used where a combination of high quality background music and public address is required. The loudspeakers are designed to be quickly and simply installed into false ceilings and are equipped with coaxial speakers for improved sound quality.


PC 5T




HORIZONTAL / VERTICAL POLAR DIAGRAMS

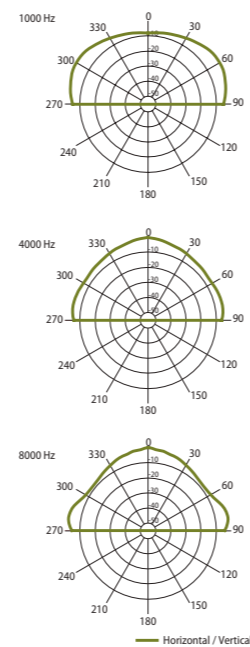

FREQUENCY RESPONSE

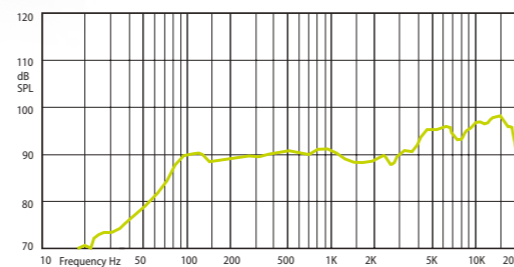

IMPEDANCE

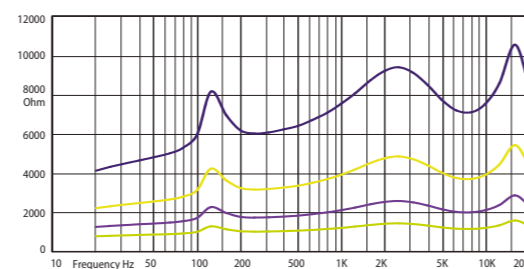


Technical Specifications	PC 5T
Rated power	10 W
Transformer power taps	10 W - 5 W - 2,5 W - 1,25 W
Sensitivity	88 dB (1 W/1 m)
Maximum SPL	98 dB (Pmax/1 m) at 15694 Hz
Frequency response	90 Hz – 20 kHz
Dispersion at 1000 Hz	120° conical
Driver dimensions	5" (130 mm) woofer, 0,5" (13 mm) tweeter, coaxial
Dimensions	ø 190 mm × 70 mm
Weight	1,1 kg
Material	Plastic, Steel grill
Colour	White (RAL 9016)


PC 8T




HORIZONTAL / VERTICAL POLAR DIAGRAMS

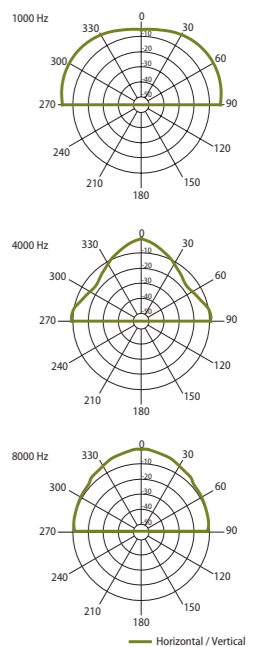

FREQUENCY RESPONSE

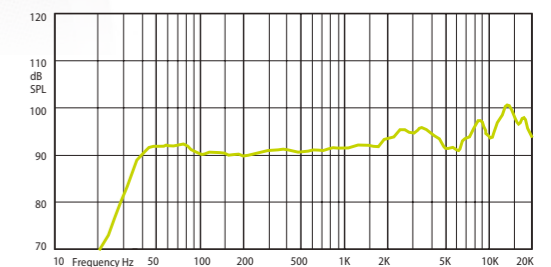

IMPEDANCE

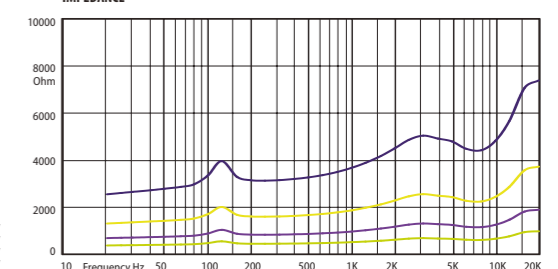

Technical Specifications	PC 8T
Rated power	20 W
Transformer power taps	20 W - 10 W - 5 W - 2,5 W
Sensitivity	88 dB (1 W/1 m)
Maximum SPL	101 dB (Pmax/1 m) at 15249 Hz
Frequency response	80 Hz – 20 kHz
Dispersion at 1000 Hz	120° conical
Driver dimensions	8" (200 mm) woofer, 0,5" (13 mm) tweeter, coaxial
Dimensions	ø 245 mm × 95 mm
Weight	2,1 kg
Material	Plastic, Steel grill
Colour	White (RAL 9016)