



## Product information:

The VC3xx2 Series are 100 Volt wall volume controllers whereby the volume for 100 V loudspeakers can be adjusted in 11 steps of 3 dB. They feature a slim and good looking design and are constructed out of sturdy ABS, making them suitable for big projects in industrial environments as well as standard home interiors. An integrated 24 Volt relay allows bypassing of the volume controller in priority situations, making sure the message is always clearly heard at maximum volume. Connections are made using screw terminal blocks, and flush and surface mount boxes (WB3102) are separately available.

## Applications:

- Corporate
- Residential

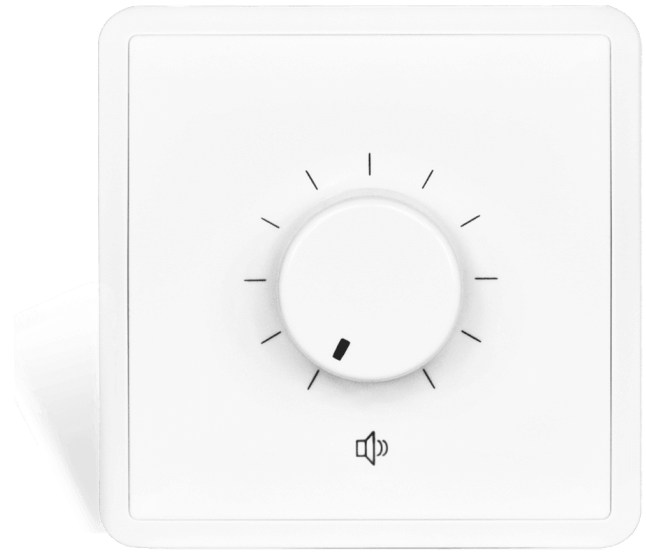

## System specifications:

Peak power handling	40 W
Program power handling	20 W
Max. operation Voltage	100 V
Attenuation	11 x 3 dB
Priority relay	24 V / 25 mA

## Product Features:

---

Dimensions		80 x 80 x 50 mm (W x H x D)
Built-in depth		46 mm
Weight		0.100 kg
Construction		ABS
Colours		White
Accessories	Optional	WB3102/FS Flush mount wall box WB3102/SW Surface mount wall box

## Variants:

---

- VC3022/W - 100v wall volume controller

## Shipping & Ordering:

---

Packaging	Cardboard box
Shipping weight & volume	0.115 kg - 0.0008 Cbm