

## Highlights:

---

- 1" Dome tweeter
- 3" Low frequency loudspeaker
- Vertical and horizontal mounting
- Terminal block connection (MK2 version)
- Multi-tapping 70V / 100V line transformer

## Product information:

---

The WX302 is a powerful 2-way performance speaker suitable for a wide variety of applications, ensuring true-to-nature, high fidelity reproduction of music and speech. It is fitted with a 1" dome tweeter and a 3" low-frequency loudspeaker, capable of delivering a power of 30 Watt. It can be used in standard 8 Ohm systems but also in 70/100V PA systems with power taps for 20 Watt, 10 Watt and 5 Watt. The elegant shaped synthetic enclosure is available in two different colours (black and white), making it blend into any environment going from standard indoor home to special indoor design interiors. The included steel mounting bracket allows horizontal and vertical mounting as well as focusing of the speaker and an integrated advanced protection network protects the tweeter against overload.

This new series retains all its strengths but has also been upgraded in a few specific areas with installer convenience and durability in mind. The connection of the indoor loudspeakers is changed to a terminal block, which makes it easier to install and connect the WX MK2 series wall speaker, while daisy-chaining is made more convenient through additional connection terminals (4-pin).. Both indoor and outdoor versions are now equipped with an elegant rotatable AUDAC logo.

## Applications:

---

- Sporting facilities
- Retail
- Corporate
- Bars & Restaurants
- Residential




## Impedance:

---

$\Omega$  8 Ohm

## Voltage:

---

 70-100 Volt

## System specifications:

|                            |                        |   |
|----------------------------|------------------------|---|
| Crossover                  | Frequency              | 2.5 kHz                                       |
|                            | Type                   | Passive built-in                              |
| Drivers                    | HF                     | 1"  |
|                            | LF                     | 3"  |
| Frequency                  | Range (-10 dB)         | 60 Hz - 20 kHz                                |
|                            | Response ( $\pm 3$ dB) | 90 Hz - 18 kHz                                |
| Impedance                  |                        | 8 $\Omega$                                    |
| Ingress Protection rating  |                        | IP40  |
| Sensitivity (1W/1m)        |                        | 85 dB   |
| Sound Pressure (Max. W/1m) | @ 100 V                | 95 dB   |
|                            | @ 8 $\Omega$           | 100 dB  |
| Speaker type               |                        | 2-way   |
| RMS/AES power handling     |                        | 30 W  |
| Peak power handling        |                        | 120 W   |
| Program power handling     |                        | 60 W  |
| Dispersion                 | Horizontal             | 100°  |
|                            | Vertical               | 100°  |
| Line Transformer Tappings  | 1                      | 250 $\Omega$ - 100 V / Not used - 70 V / 20 W |
|                            | 2                      | 500 $\Omega$ - 100 V / 20 W - 70 V / 10 W     |
|                            | 3                      | 1000 $\Omega$ - 100 V / 10 W - 70 V / 5 W     |
|                            | 4                      | 2000 $\Omega$ - 100 V / 5 W - 70 V / 2.5 W    |

## Product Features:

|                       |          |  |
|-----------------------|----------|--|
| Dimensions            |          | 188.4 x 129 x 164.8 mm (W x H x D) (Incl. bracket) |
| Weight                |          | 1.66 kg  |
| Operating temperature |          | -25 °C ~ 70 °C                                     |
| Construction          |          | ABS  |
| Mounting & handling   |          | Mounting bracket                                   |
| Front finish          |          | Steel grill  |
| Colours               |          | Black (RAL9005) (WX302MK2/B)                       |
|                       |          | White (RAL9003) (WX302MK2/W)                       |
| Accessories           | Included | Mounting bracket                                   |

## Variants:

---

- WX302MK2/B - Black version
- WX302MK2/W - White version

## Shipping & Ordering:

---

Packaging

Cardboard box

Shipping weight & volume

3.900 kg - 0.016 Cbm (2 pcs)


## Architects' and Engineers' Specifications:

---


The loudspeaker shall be a surface-mount 2-way type, consisting of a 3" woofer and 1" tweeter which are built in an ABS enclosure with finely perforated front grill and fitted with a line transformer allowing it to be used on both low impedance (8 Ohm) and 100 Volt distributed lines. It shall be vertically and horizontally mountable using the supplied mounting bracket. It shall have an RMS power handling of 30 Watt with a maximum power handling of 60 Watt and the frequency response ( $\pm 3$  dB) shall range from 90 Hz to 18 kHz. The sensitivity shall be 85 dB when measured with an input signal of 1 Watt at a distance of 1 meter, while the maximum continuous sound pressure level shall be 100 dB. The loudspeaker shall have an impedance of 8 Ohm, a 70/100V line transformer and a passive built-in crossover network with a crossover frequency of 2.5 kHz. The transformer shall have multiple tapings for 20 Watt, 10 Watt and 5 Watt which are selectable, including the 8 Ohm bypass, using a rotary switch on the rear of the enclosure. The loudspeaker enclosure shall be 129 mm high, 199 mm wide and 120 mm deep and the weight shall not exceed 1.66 Kg.

# Acoustical data graphs:


## Horizontal Polars:

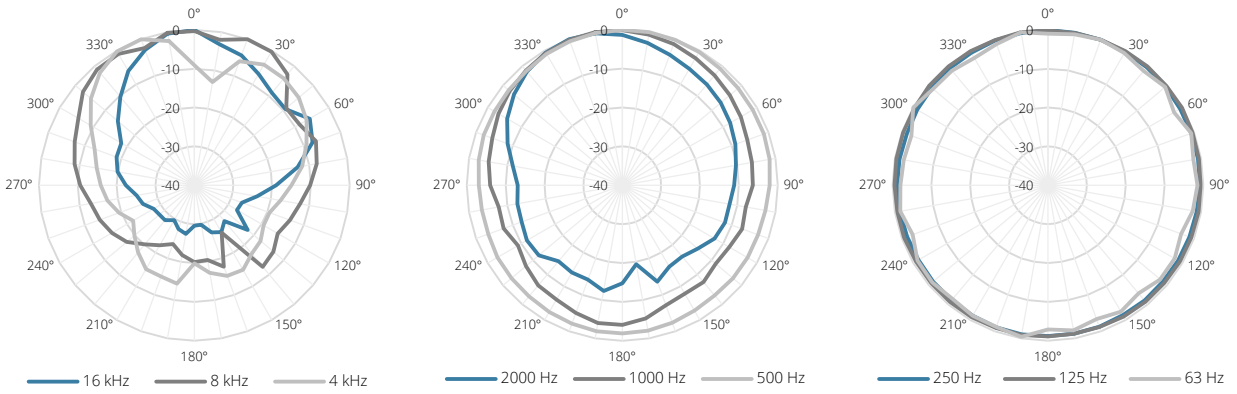


## Vertical Polars:

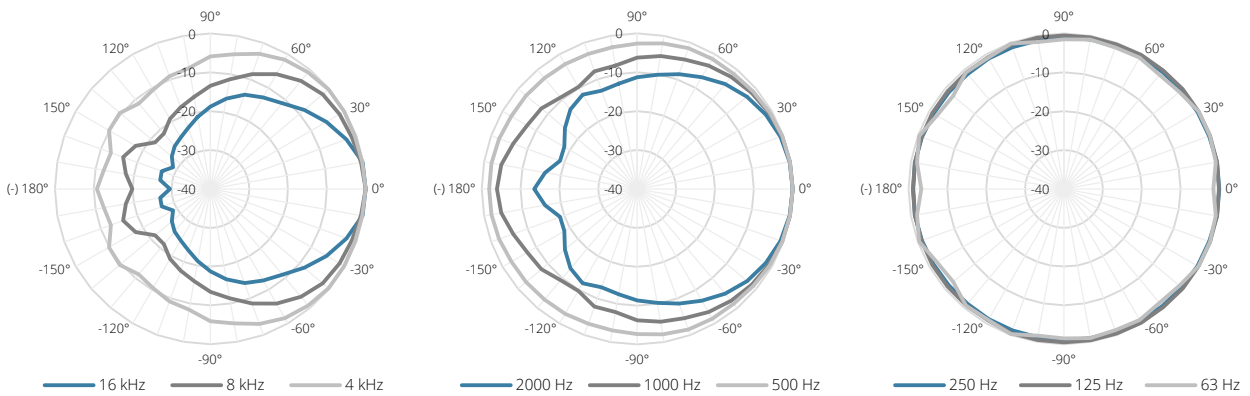


## Sensitivity:

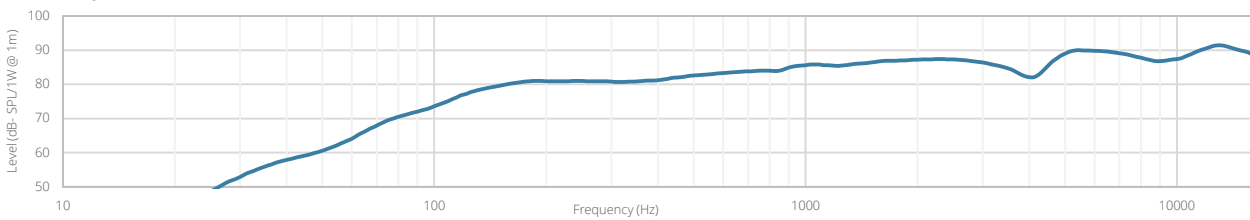


## Beamwidth (-3dB):

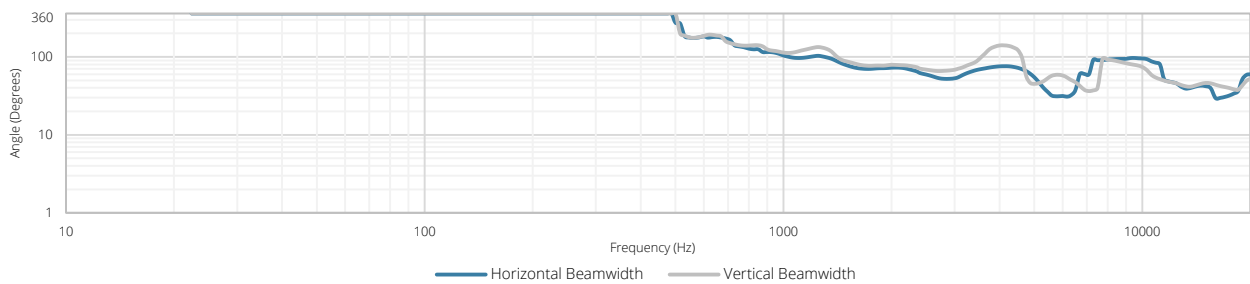

## Directivity index:

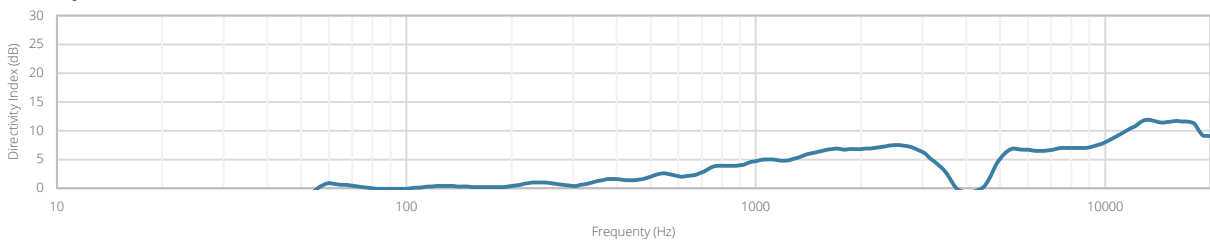

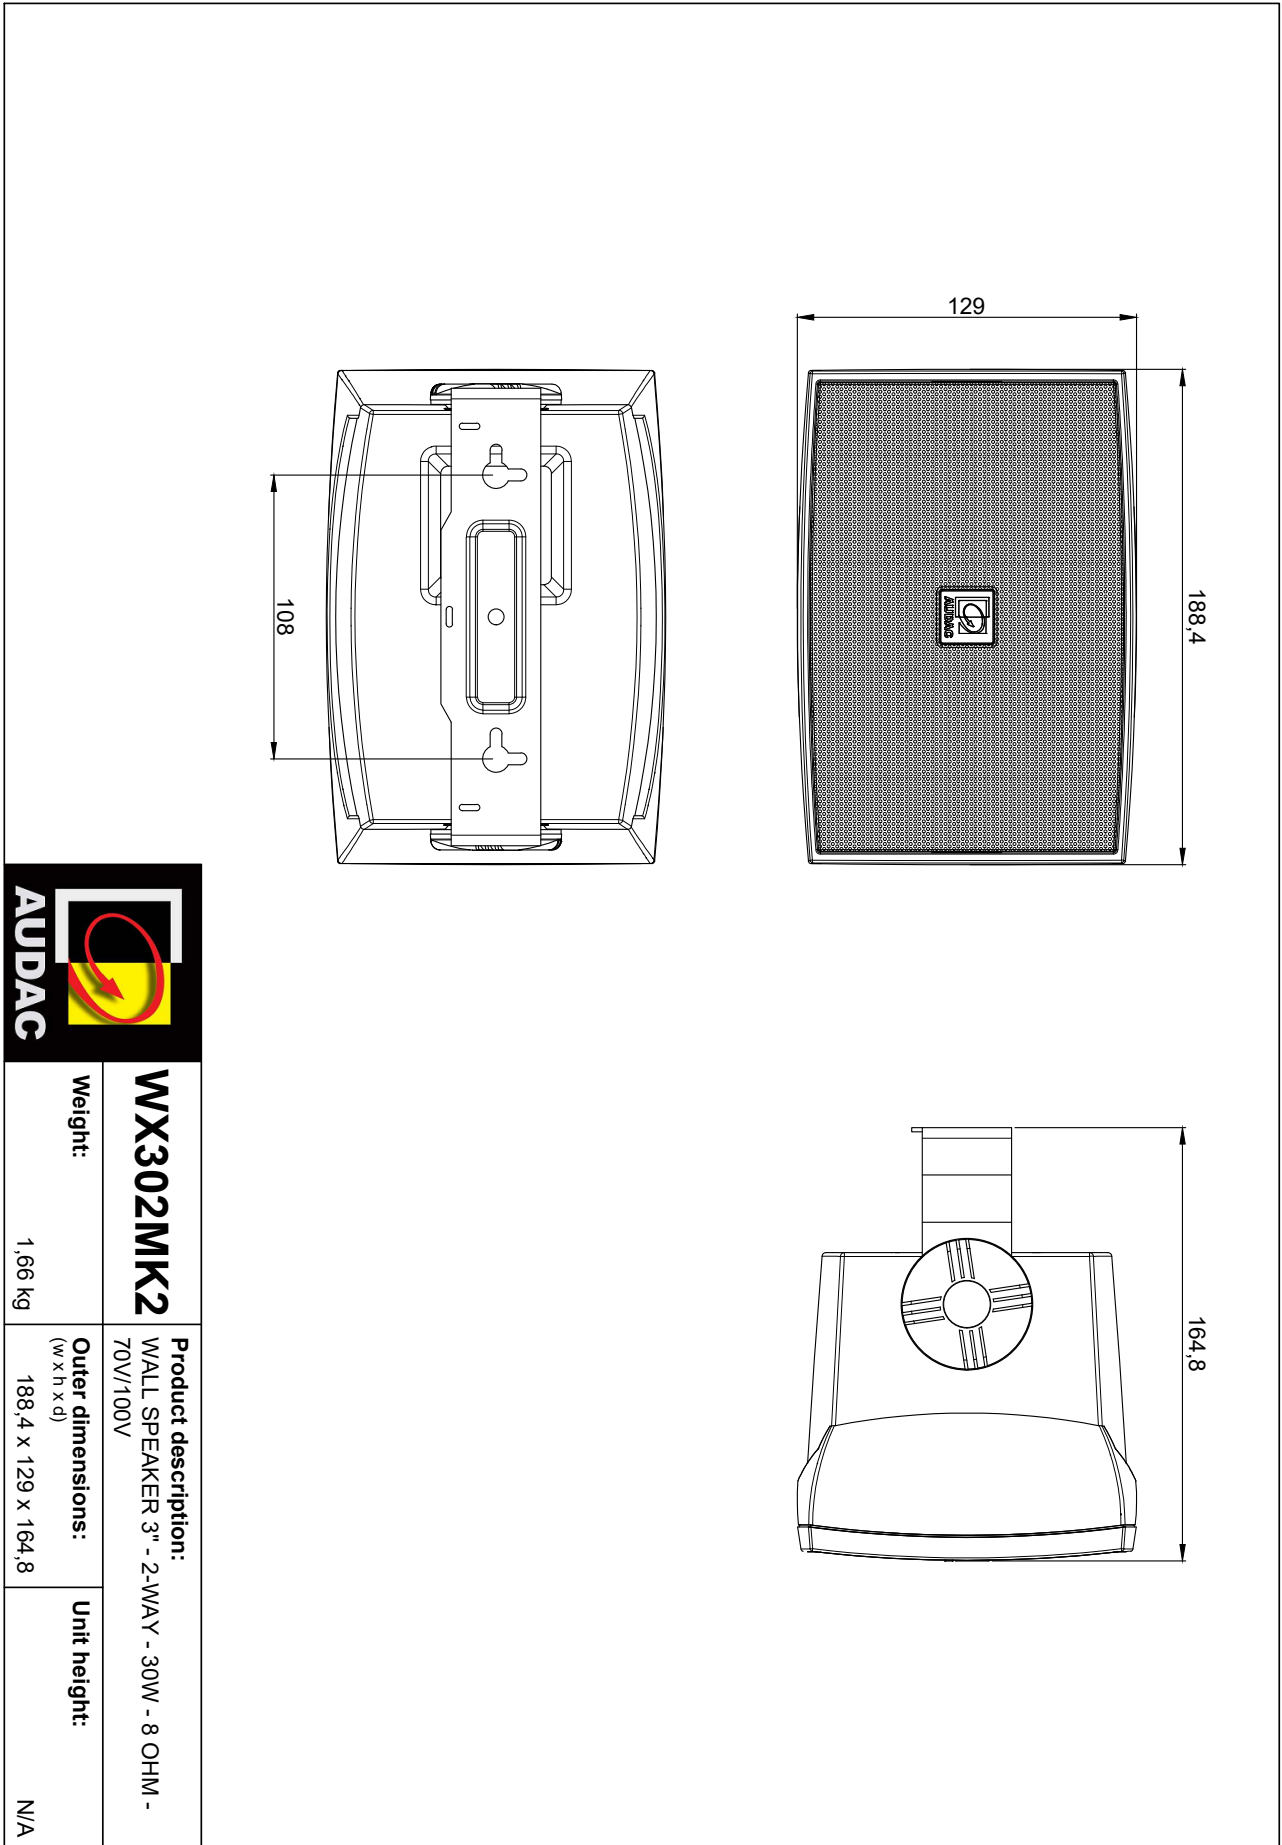

|                           |   |                            |
|---------------------------|---|----------------------------|
| <b>WX302MK2</b>           | <b>Product description:</b><br>WALL SPEAKER 3" - 2-WAY - 30W - 8 OHM - 70V/100V | <b>Unit height:</b><br>N/A |
| <b>Weight:</b><br>1,66 kg | <b>Outer dimensions:</b><br>(w x h x d)<br>188,4 x 129 x 164,8                  |                            |