

USING THE M10 EYEBOLT KIT

WARNING — Read and understand the instructions and diagram below before using this kit. Misuse of product may result in damage, injury or death.

APPLICATION

The M10EYBLTKIT is intended to be used only for suspending/rigging Community iBOX and iFR Series loudspeakers utilizing the 10 mm mounting/rigging points provided in the top and bottom of the enclosures.

EYBLTKIT CONTENTS

(4) Shoulder eyebolts

10 mm shank diameter, 16 threads per inch, 1-1/4" long, forged eyebolts. Black zinc plated.

(4) Outside tooth steel cup washers. Black zinc plated.

INSTALLATION IN MOUNTING / RIGGING POINTS

Slide the cup washer onto the eyebolt — tooth end first. Screw the eyebolt into the mounting/rigging point and tighten BY HAND¹ so that the eyebolt shoulder seats firmly against the cup washer and the cup washer seats firmly into the countersink of the mounting/rigging point hole in the enclosure. When properly tightened, the eye may be still be turned +/- 90° to position it as needed.

¹NOTE: There is NO strength or any other benefit in tightening the eyebolt more than hand-tight.

Never exceed the Working Load Limits (W.L.L) specified in the diagram below.

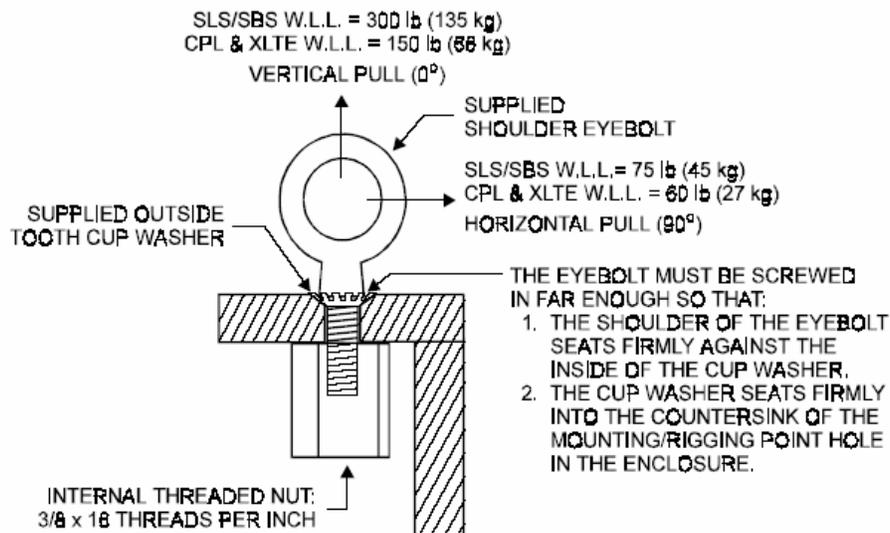


DIAGRAM: Cross-section of Mounting Rigging Point

USING THE EYEBOLTS

Always apply the load to the eye in the plane of the eye. For long term installation use a thread-locking compound. Do not attempt to bend or otherwise deform the eyebolt.